

Aura



The AURA is a precise integration of finished metal and acrylic PMMA lensing. An architectural accent light, AURA provides soft, even illumination for stairways and corridors. It can also be applied as a simple walkway marker light. With a CRI of 93 and an R9 value of 82, these LED sources provide exceptional color rendering. The color consistency is further ensured by 2-step Mac-Adam ellipse binning. Durable construction allows this product to be used in both interior and exterior IP65 applications. AURA is available in 8 standard finishes with the option to create a one-of-a-kind lighting element with a custom painted color. The classic Italian design of AURA combined with modern LED technology provides illumination and architectural integrity to any project.

Standard Finishes

- shining palladium
- golden palladium
- ever-bright brass
- everbright copper
- natural copper
- natural bronze
- white painted
- corten painted



Shining Palladium



Gold Palladium



Ever-bright Brass



Ever-Bright Copper



Natural Copper



Natural Bronze



White Painted



Corten Painted

JOB:	TYPE:	QUANTITY:
------	-------	-----------

NOTES:

Technical Data



Input

350ma - dimmable with appropriate driver

Wattage

1.2W

Color Temperatures

2700°K (WW), 3000°K (W), 4000°K (N)

2 step MacAdam ellipse binning

CRI / R9




92 / 84

Lumens

140 lm (WW) 150 lm (W) 170 lm (N)

Optic

360°

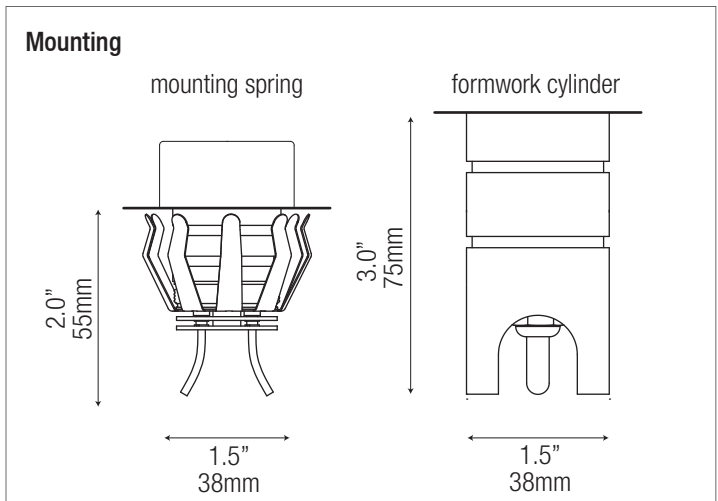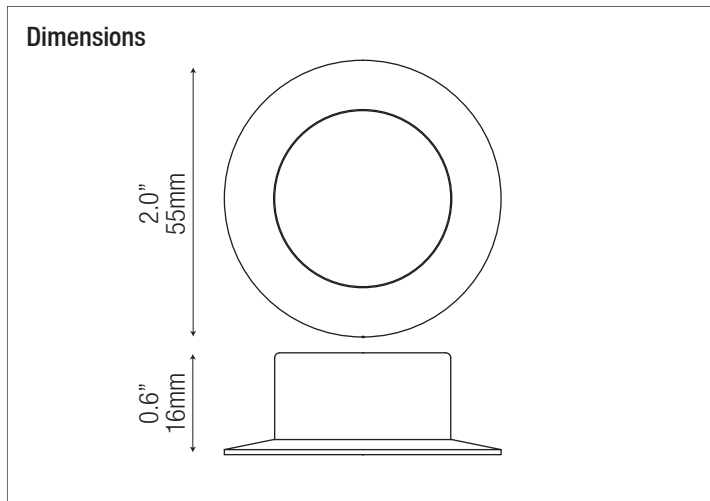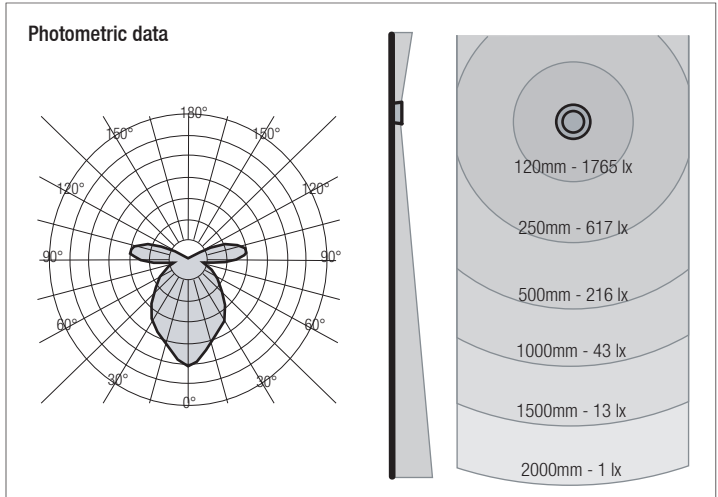

Order Code

Code	Wattage	Voltage	CRI & CCT	Finish	Mounting
AUR - 2W - 350MA -					

- 927** = 90 CRI, 2700°K
- 930** = 90 CRI, 3000°K
- 940** = 90 CRI, 4000°K

- SP** = Shining Palladium
- GP** = Gold Palladium
- EBR** = Ever-bright Brass
- EBC** = Ever-bright Copper
- NBR** = Natural Brass
- NBZ** = Natural Bronze
- WH** = White
- CT** = Corten
- XX** = Custom

- SPR** = Spring
- FWC** = Formwork cylinder

Drivers

Non-dimmable

DR-4W350MA-OUT - 1 to 3 pieces

Phase Dimmable

DR-16W350MA-DIMW - 9 to 13 pieces

0-10V Dimmable

DR-3W350MA-OUT - 1 to 2 pieces