


# Step

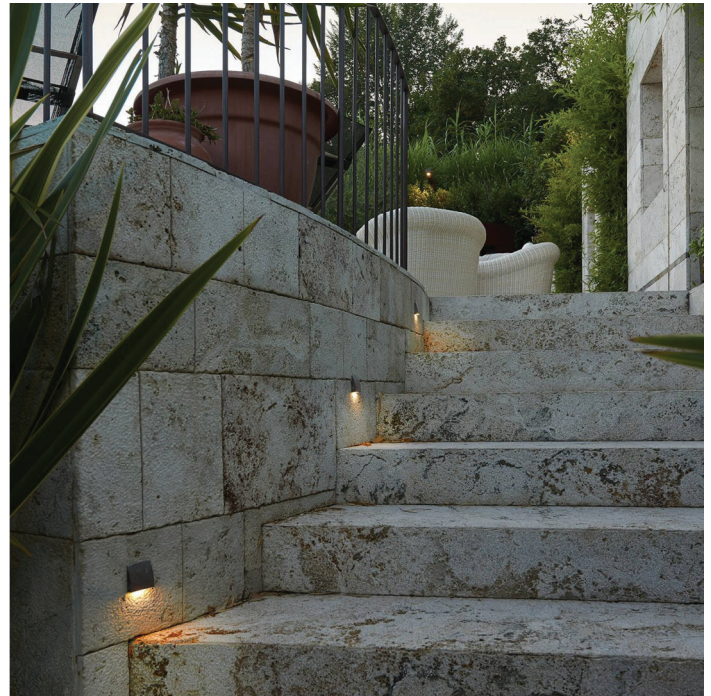

The STEP is a miniature die-cast discrete architectural accent light, STEP provides soft, even illumination for stairs, theater seating aisles and corridors. It can also be applied as a simple walkway marker light. With a CRI of 93 and an R9 value of 82, these LED sources provide exceptional color rendering. The color consistency is further ensured by 2-step MacAdam ellipse binning. Durable die-cast construction allows this product to be used in both interior and exterior IP65 applications. STEP is available in 6 standard finishes with the option to create a one-of-a-kind lighting element with a custom painted color. The classic Italian design of STEP combined with modern LED technology provides illumination and architectural integrity to any project.

### Standard Finishes

- white painted
- corten painted
- shining palladium
- golden palladium
- natural copper
- zinc



White Painted



Corten Painted



Shining Palladium



Gold Palladium



Natural Copper



Zinc

JOB:	TYPE:	QUANTITY:
------	-------	-----------

### NOTES:

**Technical Data**



**Input**

24VDC - dimmable with appropriate driver

**Wattage**

1.1W

**Color Temperatures**

2700°K (WW), 3000°K (W), 4000°K (N)

2 step MacAdam ellipse binning

**CRI / R9**




92 / 84

**Lumens**

140 lm (WW) 150 lm (W) 170 lm (N)

**Optic**

120°

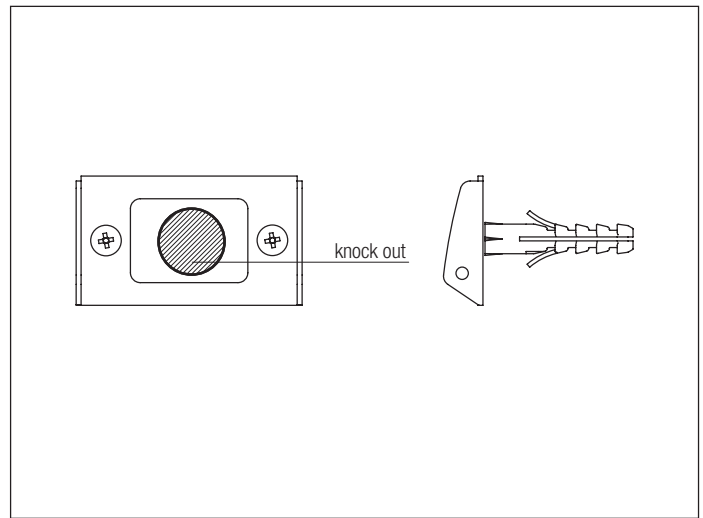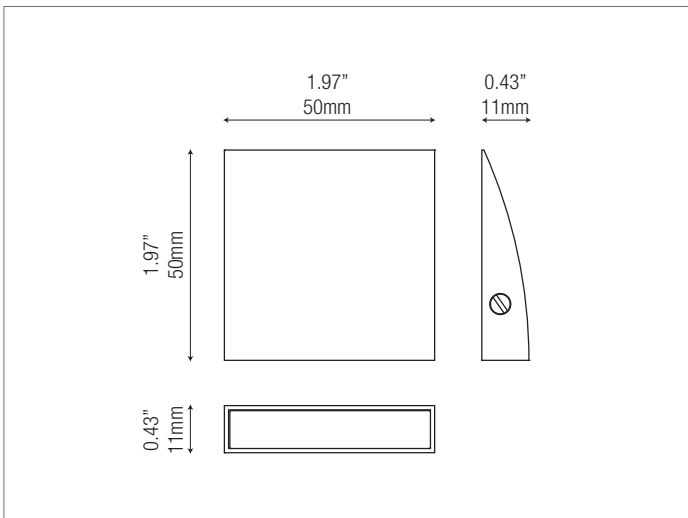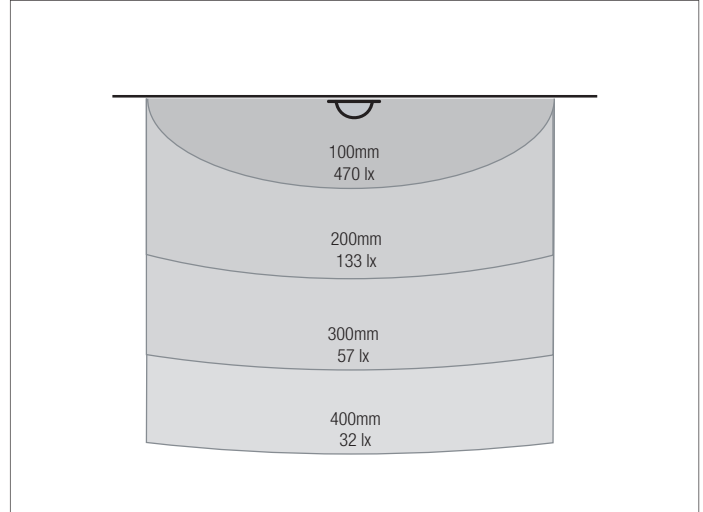

**Order Code:**

Code    Wattage    Voltage                                  CRI & CCT                                  Finish  
 STP - 1W - 24VDC - \_\_\_\_\_ - \_\_\_\_\_

- |                             |                               |
|-----------------------------|-------------------------------|
| <b>927</b> = 90 CRI, 2700°K | <b>WH</b> = White             |
| <b>930</b> = 90 CRI, 3000°K | <b>CT</b> = Corten            |
| <b>940</b> = 90 CRI, 4000°K | <b>SP</b> = Shining Palladium |
|                             | <b>GP</b> = Gold Palladium    |
|                             | <b>NC</b> = Natural Copper    |
|                             | <b>ZN</b> = Zinc              |
|                             | <b>XX</b> = Custom            |

## Drivers

### Non-dimmable

DR-30W24VDC-OUT - up to 25 pieces

### Phase Dimmable

DR-24W24VDC-DIMA - up to 20 pieces

### 0-10V Dimmable

DR-40W24VDC-DIMW-0-10V-OUT - up to 30 pieces