

Viewer



The PURALUCE VIEWER is an architectural accent light, that can be applied as a simple exterior walkway marker light or in interior applications that will provide soft, even illumination for stairways and corridors. The crisp die-cast housing introduces a unique architectural design to any application. With a CRI of 93 and an R9 value of 82, these LED sources provide exceptional color rendering. The color consistency is further ensured by 2-step MacAdam ellipse binning. Durable construction allows this product to be used in both interior and exterior IP65 applications. VIEWER is available in 4 standard finishes with the option to create a one-of-a-kind lighting element with a custom painted color.

Standard Finishes

- shining palladium
- natural copper
- corten painted
- zinc



Shining Palladium



Natural Copper



Corten Painted



Zinc

| | | |
|------|-------|-----------|
| JOB: | TYPE: | QUANTITY: |
|------|-------|-----------|

NOTES:

Technical Data



Input

700MA Constant Current - dimmable with appropriate driver

Wattage

3W

Color Temperatures

2700°K (WW), 3000°K (W), 4000°K (N)

2 step MacAdam ellipse binning

CRI / R9




92 / 84

Lumens

350 lm (WW) 375 lm (W) 426 lm (N)

Optic

80°

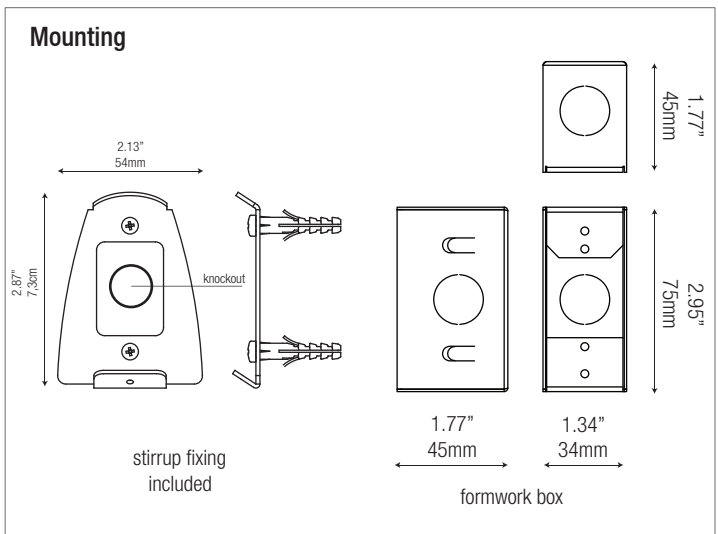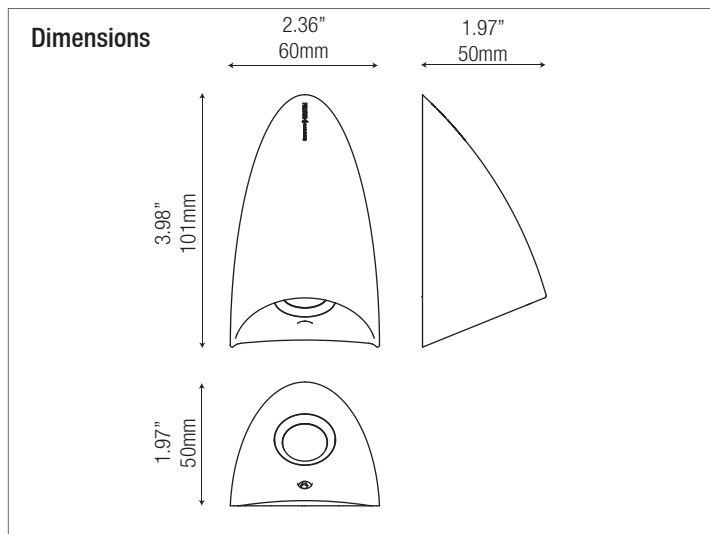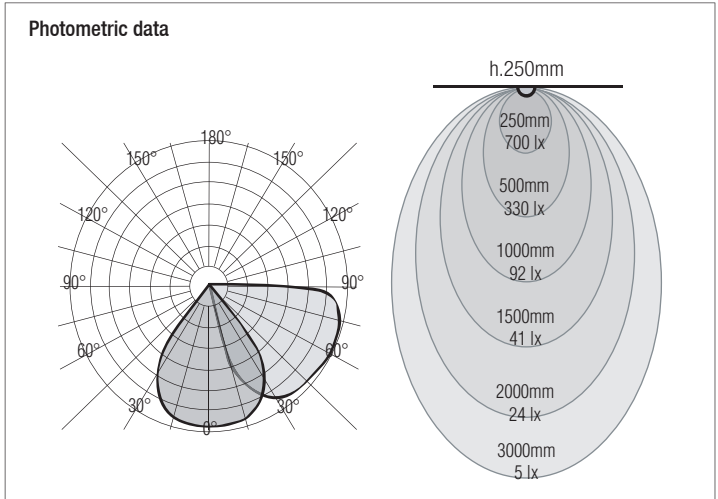

Order Code:

Code Wattage Voltage CRI & CCT Finish Mounting

VIW - 3W - 700MA - _____ _____ _____

- 927** =90 CRI, 2700°K **SS** = Stainless Steel **FWB** = Formwork box
- 930** =90 CRI, 3000°K **NC** = Natural Copper
- 940** =90 CRI, 4000°K **CT** = Corten
- ZN** = Zinc

Drivers

Non-dimmable

DR-4W700MA-OUT - 1 piece

Universal Phase / 0-10V Dimmable

DR-96W700MA-DIML - up to 25 pieces