

## Up&Down 40



The PURALUCE UP&DOWN 40 wall mounted LED up and down luminaire is constructed of solid brass. There are four standard finishes and two beam distributions 12 and 30 degrees. Available in color temperatures 2700K, 3000K and 4000K. The Down 40 operates on 24VDC.

### Standard Finishes

#### Body

white painted  
grey painted  
ever-bright brass  
natural copper



White Painted



Grey Painted



Ever-bright Brass



Natural Copper

JOB:

TYPE:

QUANTITY:

NOTES:

**Technical Data**



**Input**

120-277VAC - Triac or 0-10V Dimmable

**Wattage**

2 x 3W

**Color Temperatures**

2700°K (WW), 3000°K (W), 4000°K (N)

2 step MacAdam ellipse binning

**CRI / R9**

92 / 84

**Lumens**

3W - 375 + 375 lm (W), 426 + 426 lm (NW)

**Optic**

12°, 30°

**Photometric data**

Diagramma Polare (12°)




Diagramma Conico (3W)




Diagramma Polare (30°)







Diagramma Conico (3W)



**Dimensions**

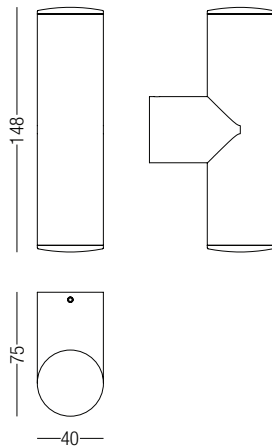

**Mounting**

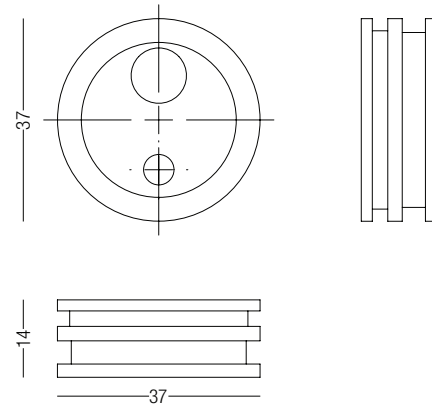

**Order Code**

Code	Wattage	Power In	Power Out	CRI & CCT	Optic	Body Finish
U&D40	- 7W	- UNV	-	-	-	-

- 24VDC** = 24 VDC
- CC** = Constant Current
- 930** = 90 CRI, 3000°K
- 940** = 90 CRI, 4000°K
- 12** = 12°
- 30** = 30°
- WH** = White Painted
- GP** = Grey Painted
- CT** = Ever-bright Brass
- NC** = Natural Copper

Eg. U&D40-7W-UNV-24VDC-930-30-NC