

Up o Down 40



The PURALUCE UP or DOWN 40 wall mounted LED luminaire is constructed of solid brass. There are four standard finishes and two beam distributions of 12 and 30 degrees. Available in color temperatures 2700K, 3000K and 4000K. The Down 40 operates on 24VDC.

Standard Finishes

Body

- white painted
- grey painted
- ever-bright brass
- natural copper
- ever-bright copper



White Painted



Grey Painted



Ever-bright Brass



Natural Copper

JOB:	TYPE:	QUANTITY:
------	-------	-----------

NOTES:

Technical Data



Input

120-277VAC - Triac or 0-10V Dimmable

Wattage

3W

Color Temperatures

2700°K (WW), 3000°K (W), 4000°K (N)

2 step MacAdam ellipse binning

CRI / R9




92 / 84

Lumens

3W - 375 lm (W), 426 lm (NW)

Optic

12°, 30°

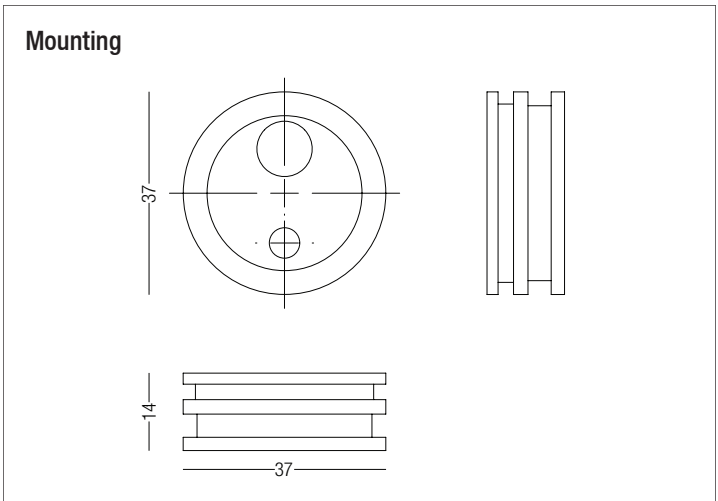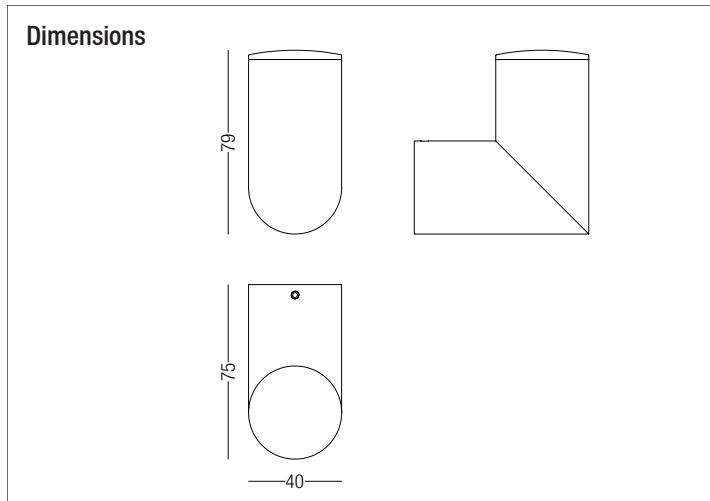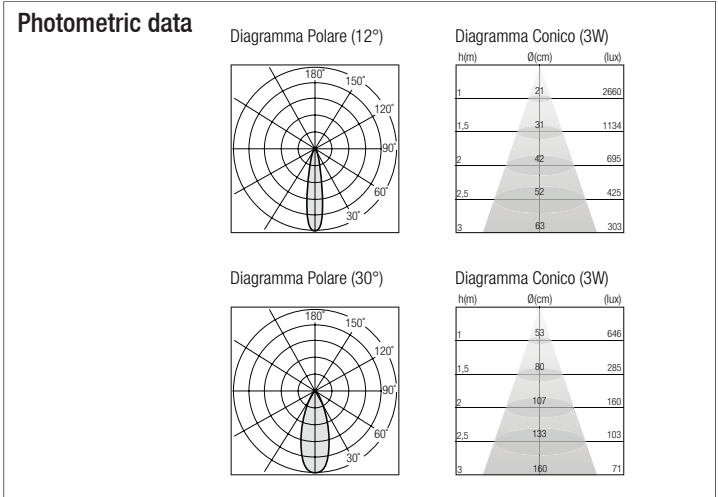

Order Code

Code	Wattage	Power In	Power Out	CRI & CCT	Optic	Body Finish
UoD40	3W	UNV	-	-	-	-

24VDC = 24 VDC **930** = 90 CRI, 3000°K **12** = 12° **WH** = White Painted
CC = Constant Current **940** = 90 CRI, 4000°K **30** = 30° **GP** = Grey Painted
CT = Ever-bright Brass **NC** = Natural Copper

Eg. UoD40-3W-UNV-24VDC-930-30-NC