



The PURALUCE LUCCIOLA is a ceiling, wall, floor, rod and spike mounted, directional spot luminaire. Constructed of aluminum it is suitable for indoor and outdoor lighting applications. There are three beam distributions of 12 and 30 degrees. Available in color temperatures 2700K, 3000K and 4000K. The Lucciola operates on 24VDC.

Standard Finishes

Body

silver anodized aluminum
natural copper
white painted



Silver Anodized Aluminum




Natural Copper



White Painted

JOB:	TYPE:	QUANTITY:
------	-------	-----------

NOTES:

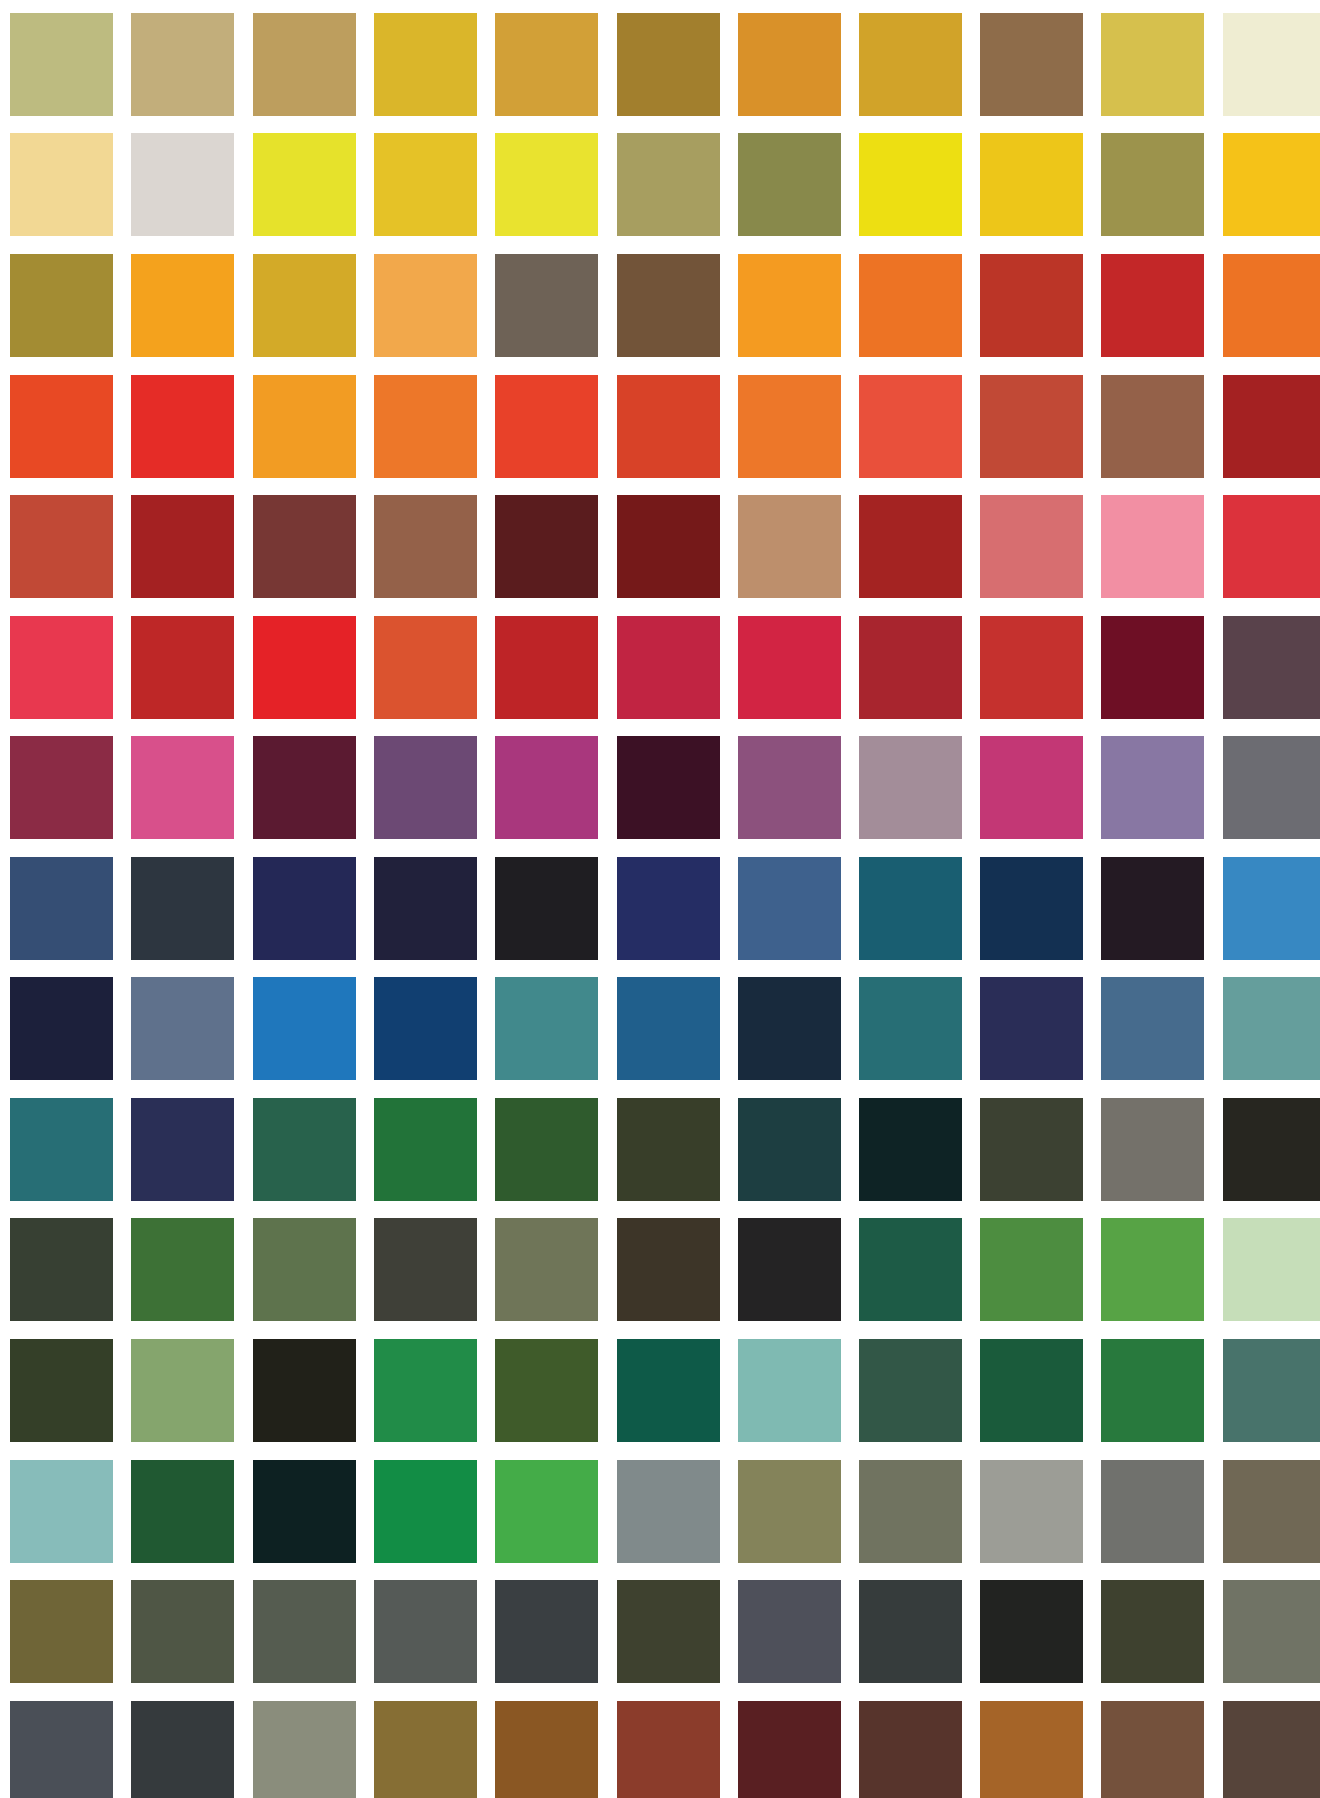

Some of our custom color options. Fixtures can be customized to any RAL color.

Technical Data



Input

24VDC

Wattage

8W

Color Temperatures

2700°K (WW), 3000°K (W), 4000°K (N)

2 step MacAdam ellipse binning

CRI / R9

92 / 82


Lumens

325 lm (W), 360 lm (N)


Optics

12°, 30°

Dimensions

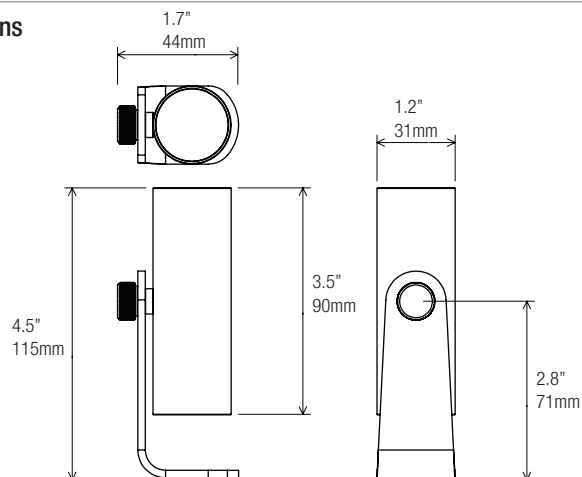


Accessories




Honeycomb filter

Mounting

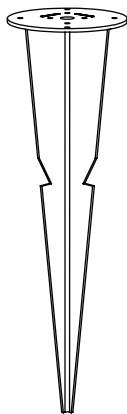

Spike

Mounting

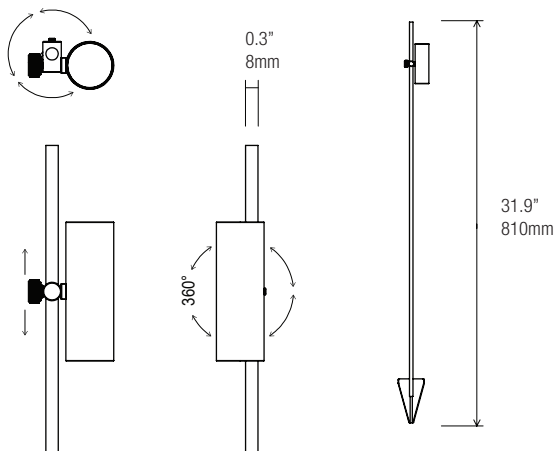


Rod


Order Code:

Code	Wattage	Input	CRI & CCT	Optic	Finish	Accessory (optional)	Mounting (optional)
LUC -	3W -	24VDC -					
			927 = 90 CRI, 2700°K	12 = 12°	SAA = Silver Anodized Aluminum	HCF = Honeycomb Filter	SPK = Spike
			930 = 90 CRI, 3000°K	30 = 30°	NC = Natural Copper		ROD = Rod
			940 = 90 CRI, 4000°K		WH = White		
					XX = Custom		

Photometric Data

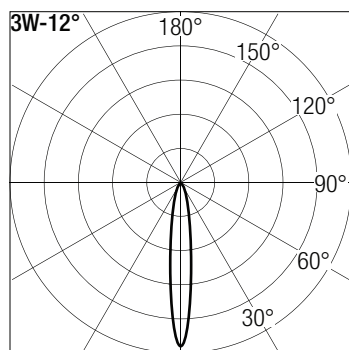

h (m)	E (lx)	D (m)
1	2660	21
1,5	1134	31
2	695	42
2,5	425	52
3	303	63

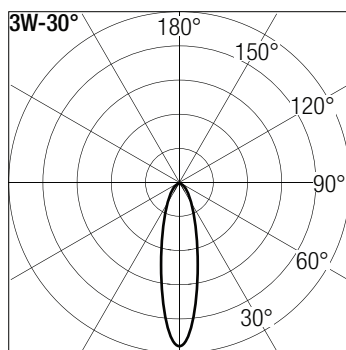

h (m)	E (lx)	D (m)
1	646	53
1,5	285	80
2	160	107
2,5	103	133
3	71	160

Drivers

24VDC Universal 5% Dimmable (120V-277V / TRIAC/ELV/0-10V)

DR-30W24VDC-DIMS-UNV - Up to 9 pieces