


# Viewer

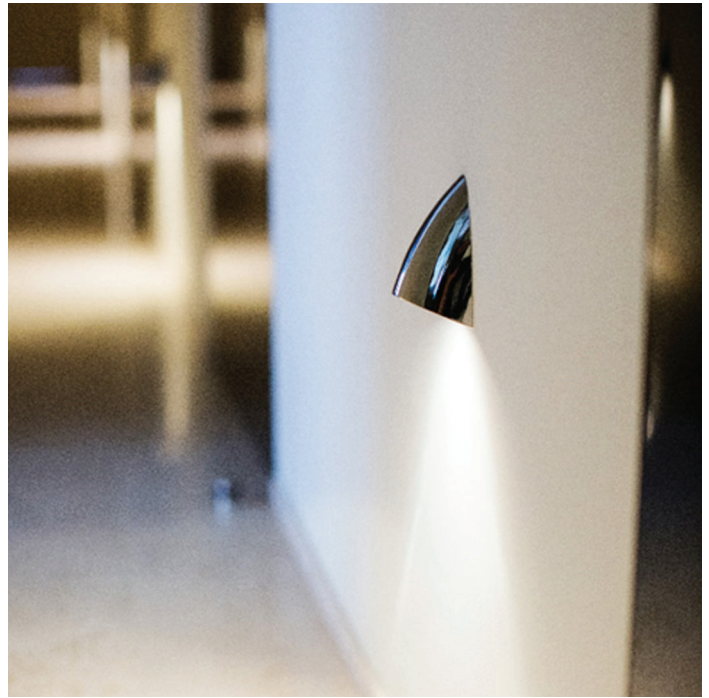

The PURALUCE VIEWER is an architectural accent light, that can be applied as a simple exterior walkway marker light or in interior applications that will provide soft, even illumination for stairways and corridors. The crisp die-cast housing introduces a unique architectural design to any application. With a CRI of 93 and an R9 value of 82, these LED sources provide exceptional color rendering. The color consistency is further ensured by 2-step MacAdam ellipse binning. Durable construction allows this product to be used in both interior and exterior IP65 applications. VIEWER is available in 4 standard finishes with the option to create a one-of-a-kind lighting element with a custom painted color.

### Standard Finishes

shining palladium  
natural copper  
corten painted  
zinc



Shining Palladium



Natural Copper



Corten Painted



Zinc

JOB:	TYPE:	QUANTITY:
------	-------	-----------

NOTES:

**Technical Data**



**Input**

700mA

**Voltage**

2~3V

**Wattage**

3W

**Color Temperatures**

2700°K (WW), 3000°K (W), 4000°K (N)

2 step MacAdam ellipse binning

**CRI / R9**




92 / 84

**Lumens**

350 lm (WW) 375 lm (W) 426 lm (N)

**Optic**

80°

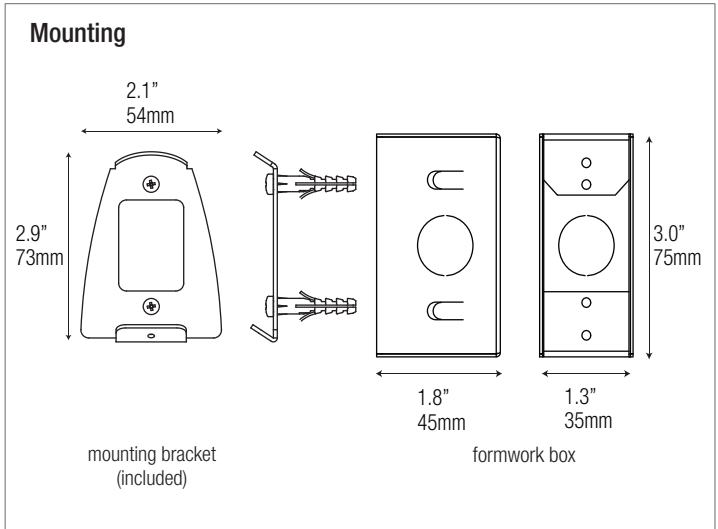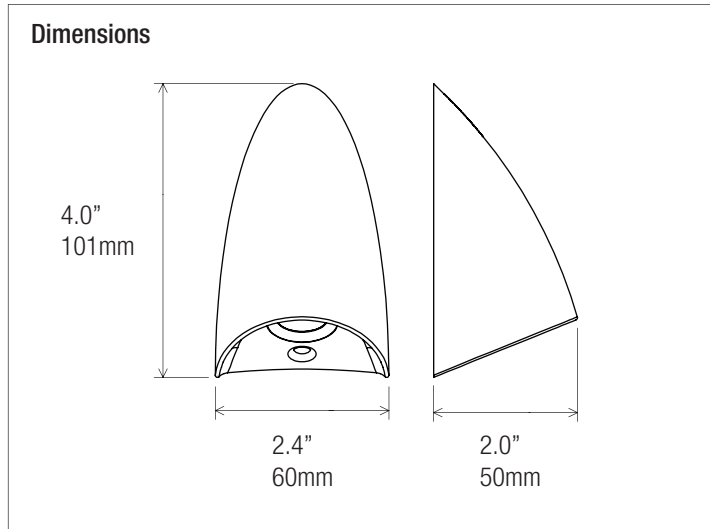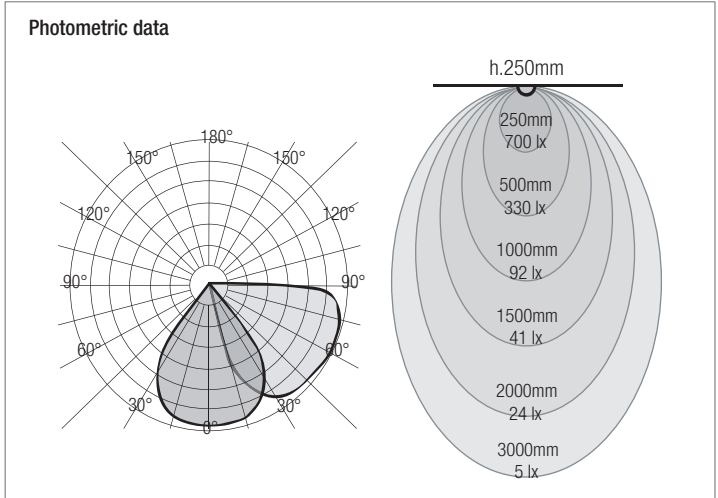

**Order Code:**

Code    Wattage    Voltage                    CRI & CCT                    Finish                    Mounting (optional)

VIW - 3W - 700MA - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

- 927** =90 CRI, 2700°K
- SS** = Stainless Steel
- FWB** = Formwork box
- 930** =90 CRI, 3000°K
- NC** = Natural Copper
- 940** =90 CRI, 4000°K
- CT** = Corten
- ZN** = Zinc
- XX** = Custom


**Drivers**

**Non-dimmable**

DR-4W700MA-OUT - 1 piece

**Universal Dimmable (TRIAC/ELV/0-10V)**

DR-15W700MA-DIWL-UNV - 4 to 5 pieces

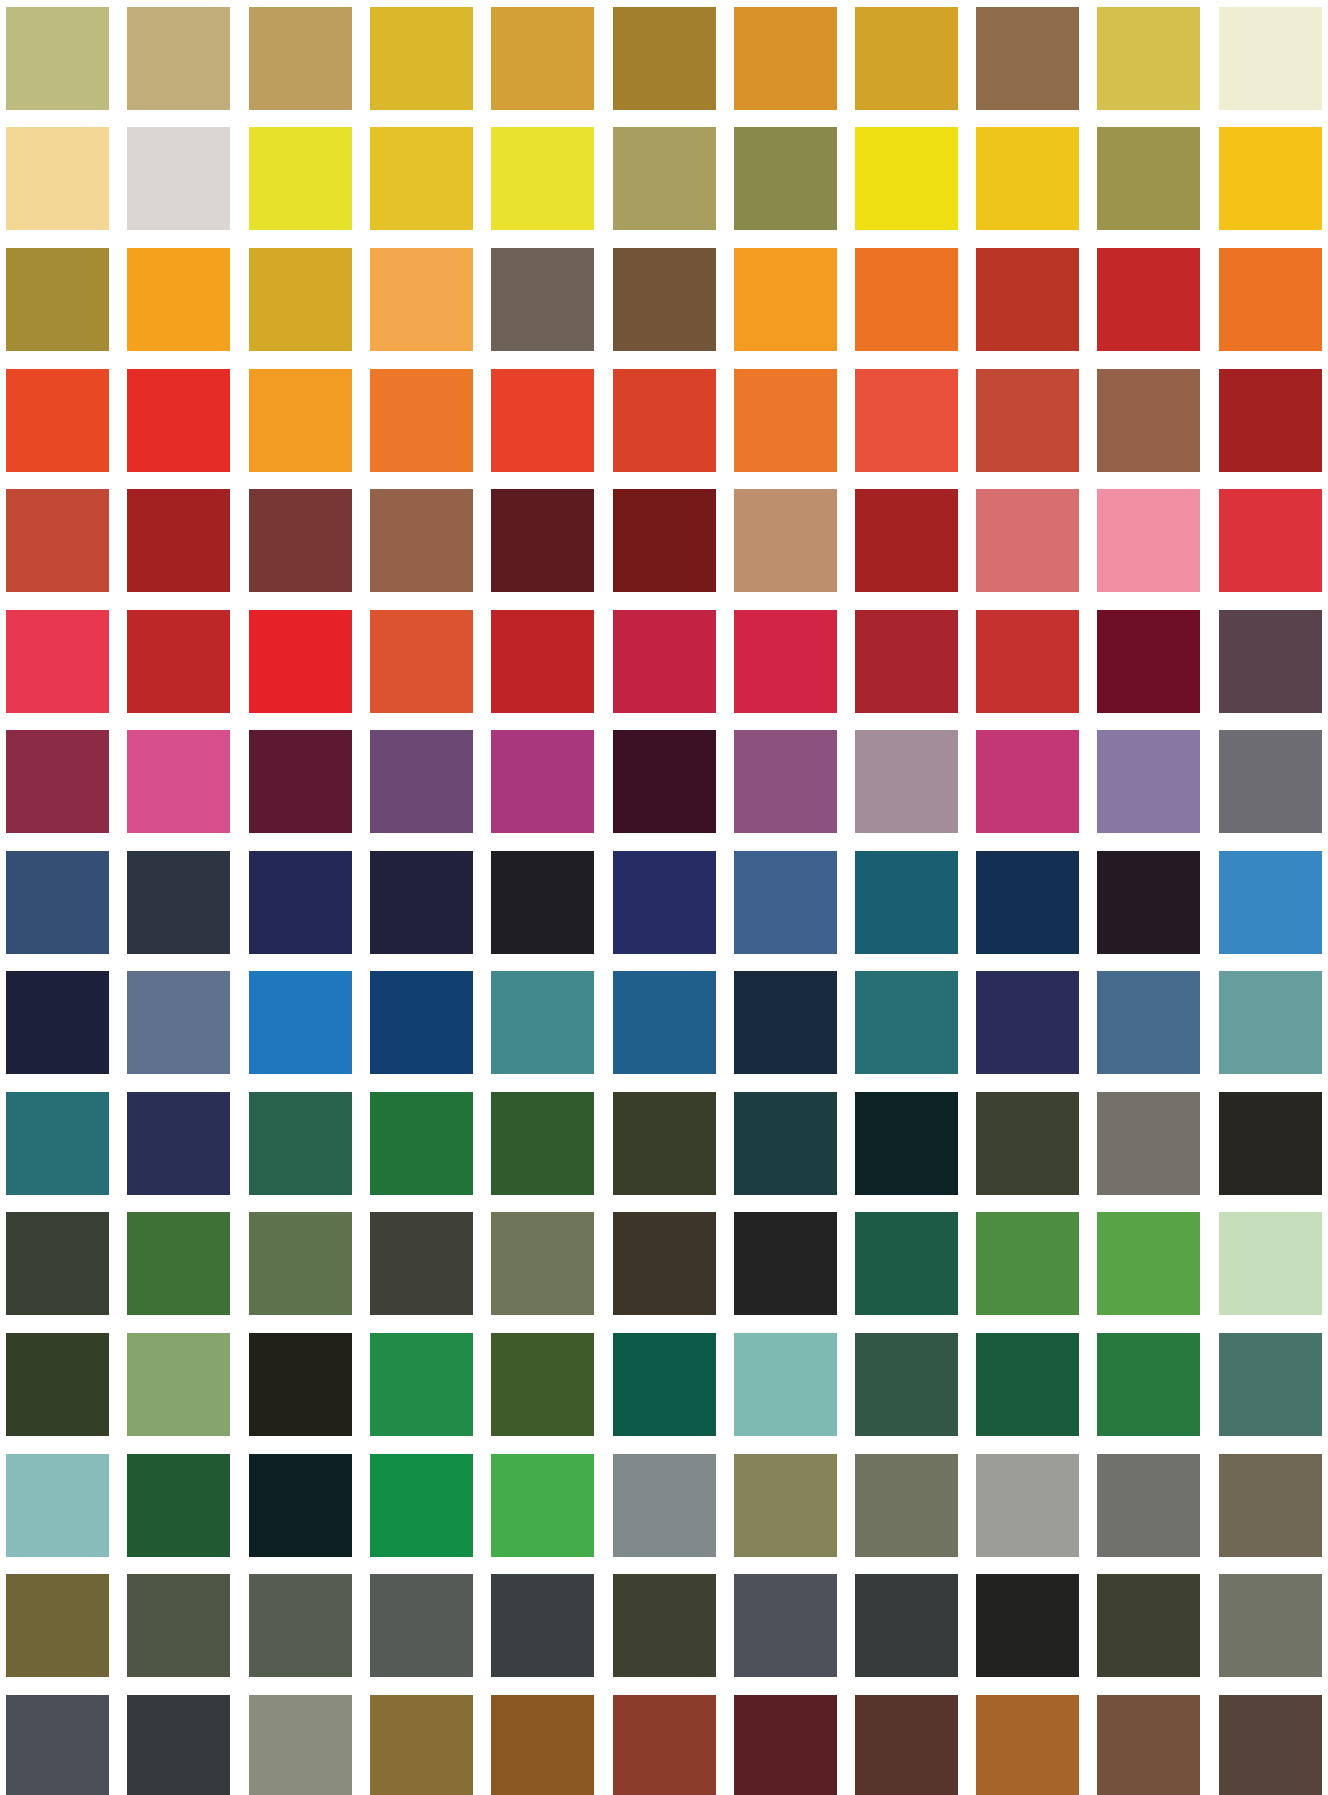

Some of your custom color options. Fixtures can be customized to any RAL color.