

## Foglio 30



The PURALUCE FOGLIO 30 is a pathway/garden marker and bollard. Multiple configurations allow this fixture to not only illuminate the pathway but your garden at the same time. Constructed of aluminum the Foglio comes in 30cm and 50cm heights for single direction or any combination of those heights in bi-directional applications. Available in color temperatures 2700K, 3000K and 4000K. The Foglio operates on 24VDC.

### Standard Finishes

**Body**  
corten painted  
Grey



Corten Painted




Grey

JOB:

TYPE:

QUANTITY:

NOTES:

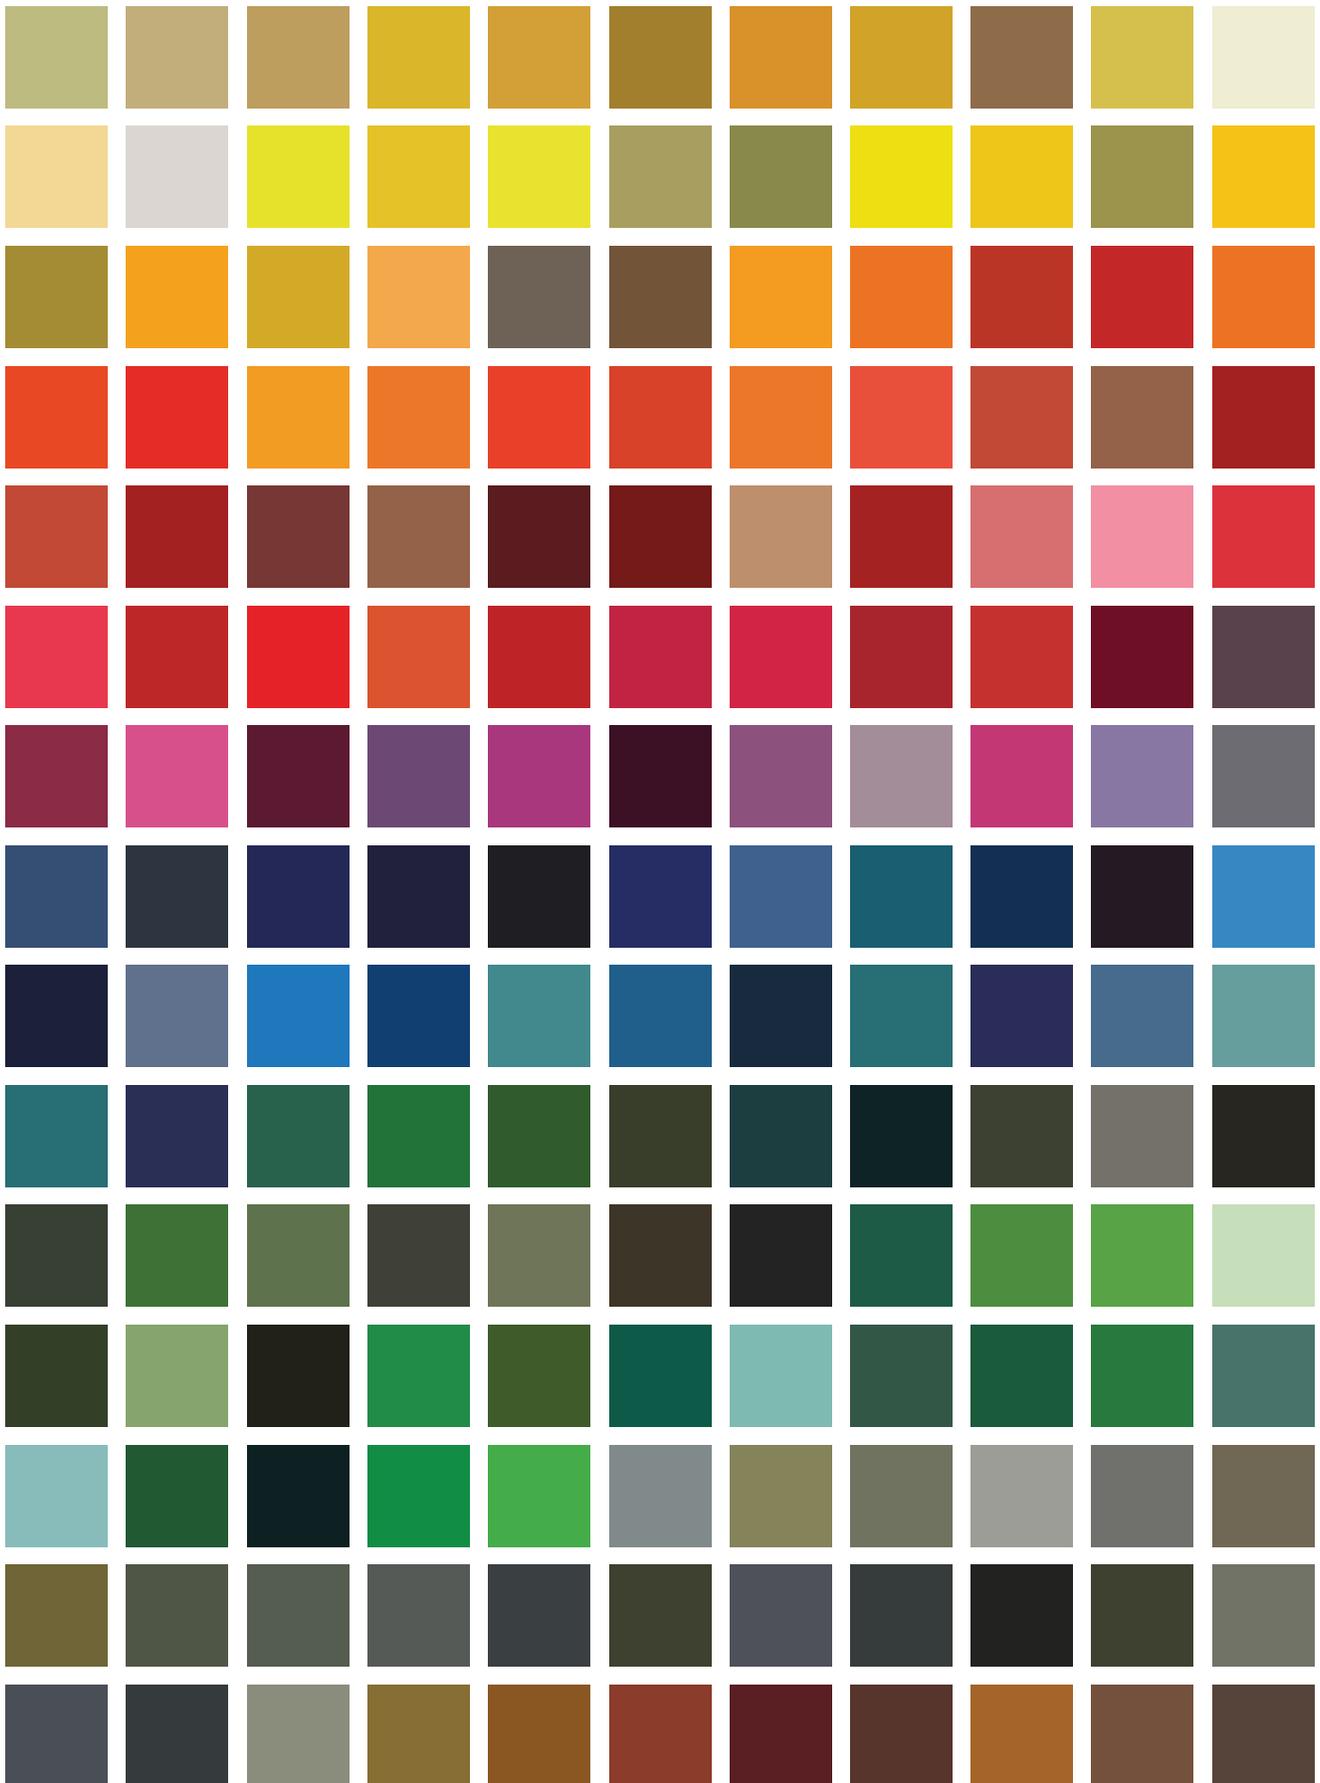

Some of your custom color options. Fixtures can be customized to any RAL color.

**Technical Data**

**Input**

24VDC - Triac or 0-10V Dimmable

**Wattage**

8W

**Color Temperatures**

2700°K (WW), 3000°K (W), 4000°K (N)

2 step MacAdam ellipse binning

**CRI / R9**




92 / 84

**Lumens**

8W - 980 lm (W)

**Optic**

90° Asymmetric

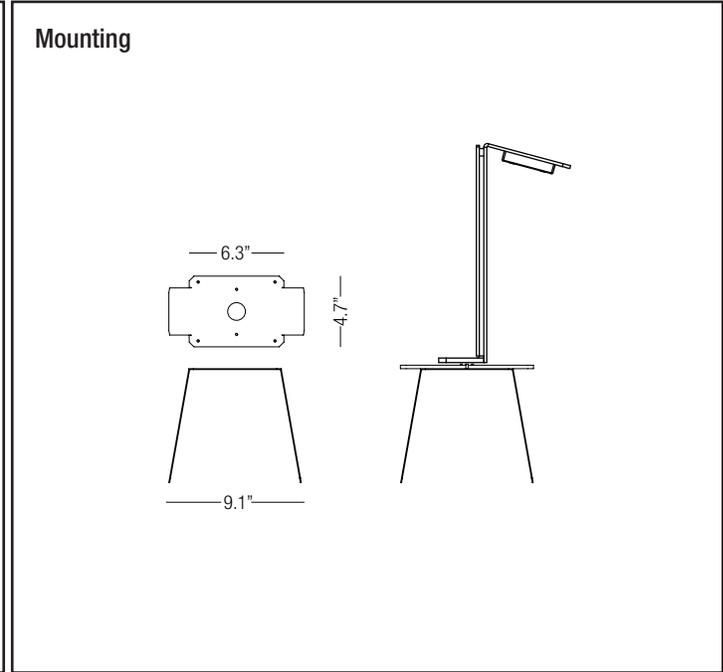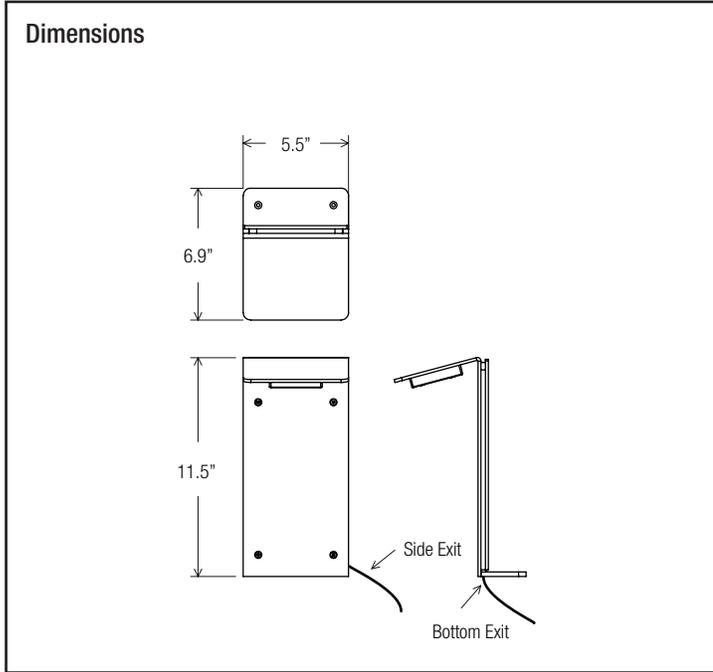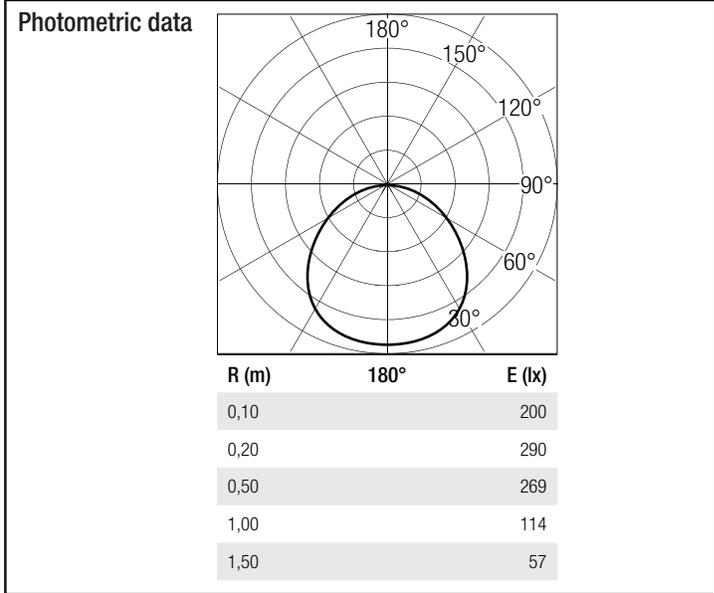

**Order Code**

Code	Wattage	Voltage	CRI & CCT	Wiring Exit	Body Finish	Mounting
FOG30	- 8W	- 24VDC	-	-	-	-

- 927** = 90 CRI, 2700°K      **B** = Bottom      **CT** = Corten      **BLT** = Bolt
- 930** = 90 CRI, 3000°K      **S** = Side          **GY** = Grey        **SPK** = Spike
- 940** = 90 CRI, 4000°K      **XX** = Custom

Eg. FOG30-8W-24VDC-930-B-CT-BLT

**Drivers**

**Non-dimmable**

DR-60W24VDC-OUT - up to 7 pieces

**Universal Dimmable (TRIAC/ELV/0-10V) \*\*LUTRON AWN (ATHENA WIRELESS NODE) OPTION AVAILABLE\*\***

DR-96W24VDC-DIMS-UNV - up to 11 pieces