

Foglio 50



The PURALUCE FOGLIO 50 is a pathway/garden marker and bollard. Multiple configurations allow this fixture to not only illuminate the pathway but your garden at the same time. Constructed of aluminum the Foglio comes in 30cm and 50cm heights for single direction or any combination of those heights in bi-directional applications. Available in color temperatures 2700K, 3000K and 4000K. The Foglio operates on 24VDC.

Standard Finishes

Body
corten painted
Grey




Corten Painted



Grey

JOB:	TYPE:	QUANTITY:
------	-------	-----------

NOTES:

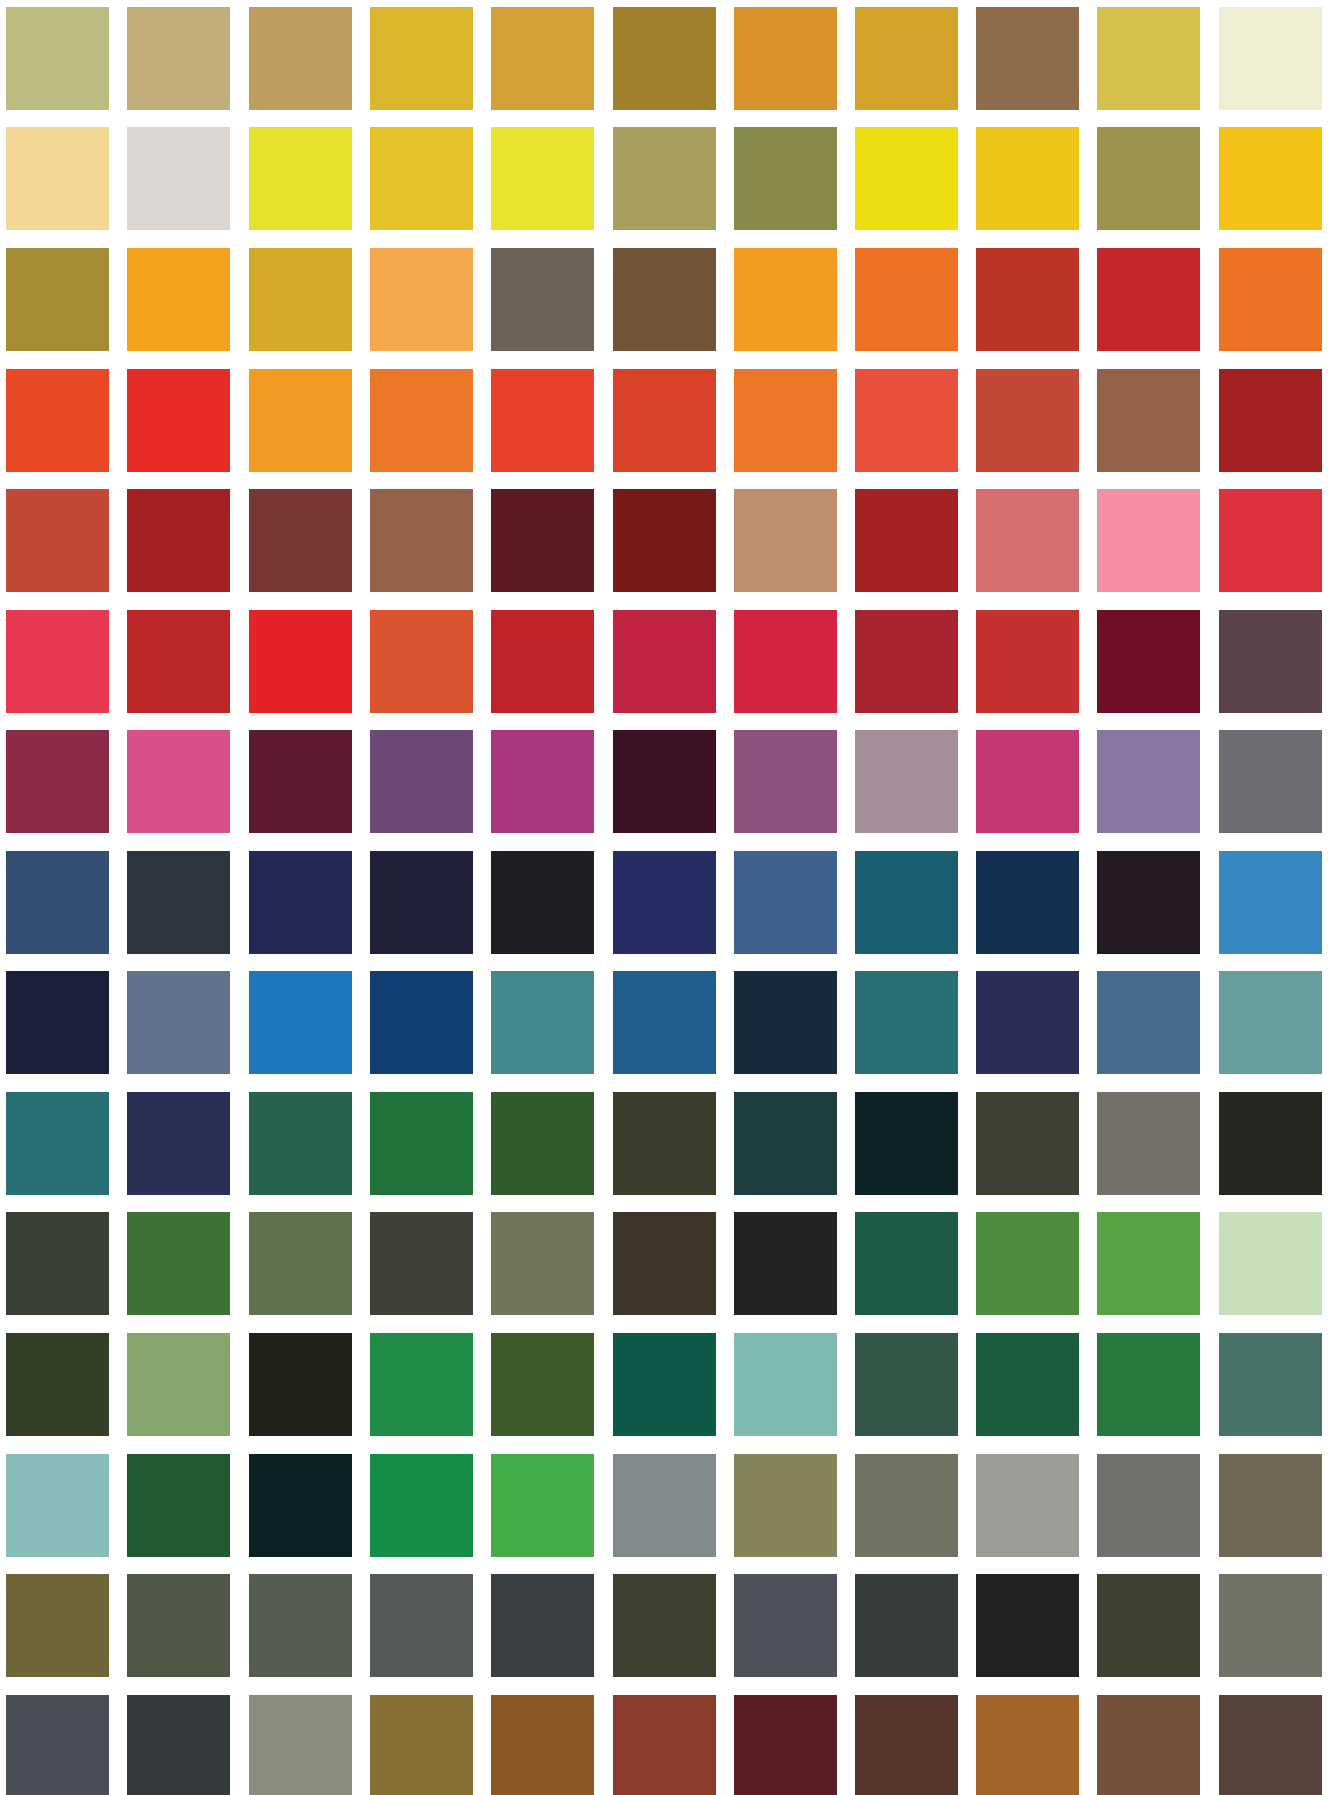

Some of your custom color options. Fixtures can be customized to any RAL color.

Technical Data

Input

24VDC - Triac or 0-10V Dimmable

Wattage

8W

Color Temperatures

2700°K (WW), 3000°K (W), 4000°K (N)

2 step MacAdam ellipse binning

CRI / R9




92 / 84

Lumens

8W - 980 lm (W)

Optic

90° Asymmetric

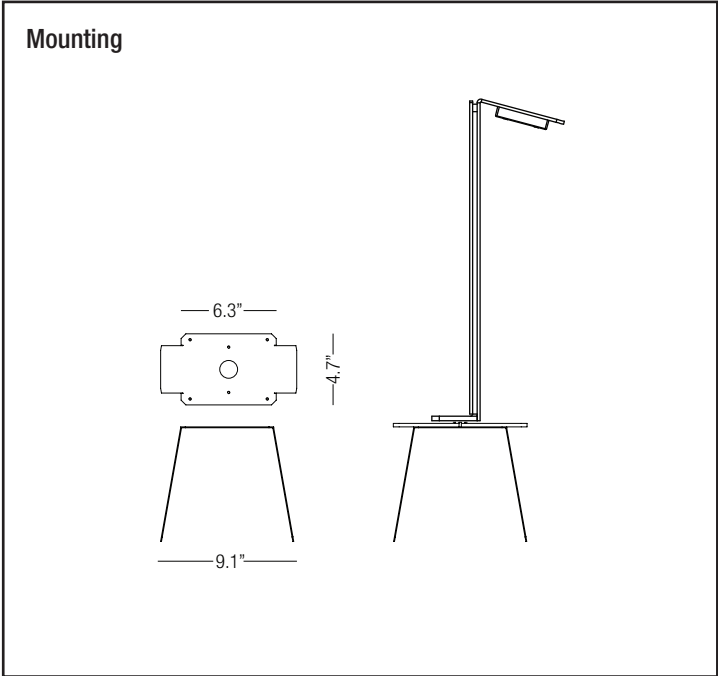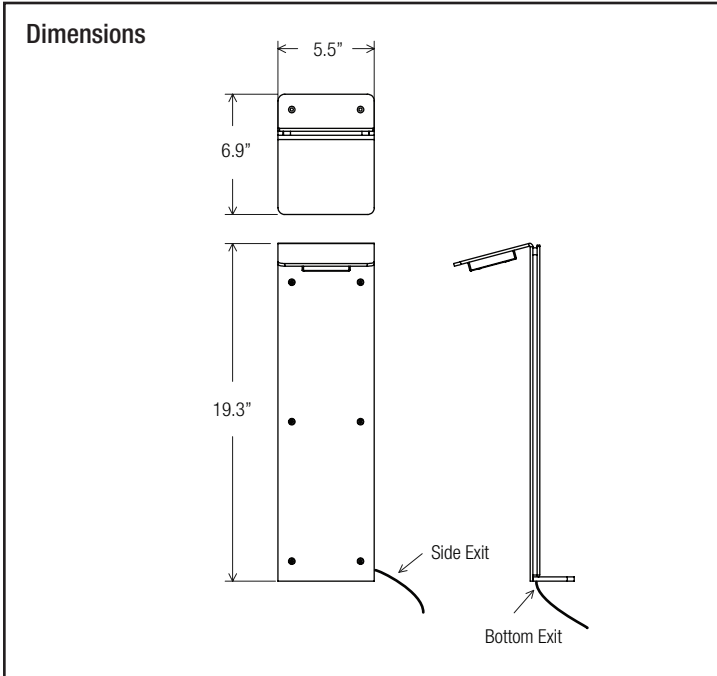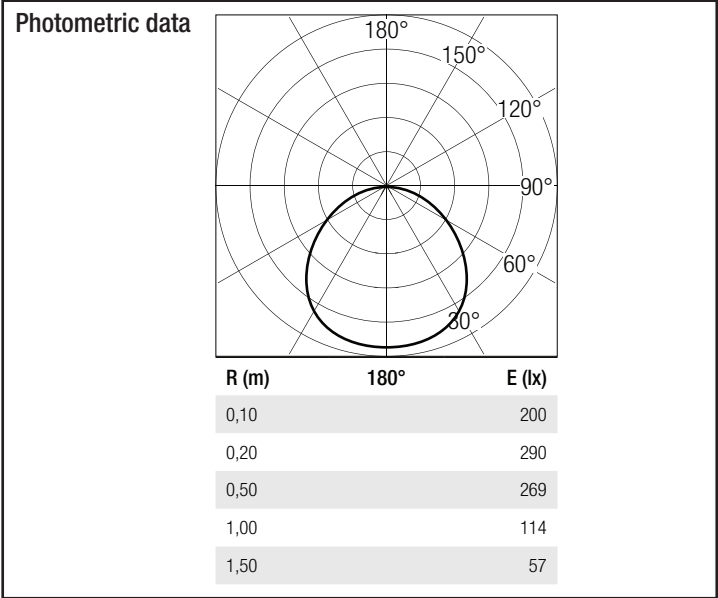

Order Code

Code	Wattage	Voltage	CRI & CCT	Wiring Exit	Body Finish	Mounting
FOG50	- 8W	- 24VDC	-	-	-	-

- 927** = 90 CRI, 2700°K **B** = Bottom **CT** = Corten **BLT** = Bolt
- 930** = 90 CRI, 3000°K **S** = Side **GY** = Grey **SPK** = Spike
- 940** = 90 CRI, 4000°K **XX** = Custom

Eg. FOG50-8W-24VDC-930-S-GY-BLT

Drivers

Non-dimmable

DR-60W24VDC-OUT - up to 7 pieces

Universal Dimmable (TRIAC/ELV/0-10V) **LUTRON AWN (ATHENA WIRELESS NODE) OPTION AVAILABLE**

DR-96W24VDC-DIMS-UNV - up to 11 pieces