

Etna 50



The PURALUCE ETNA 50 beautiful residential grade bollards constructed in either aluminum or natural copper. These bollards will add glamour to any project. Available in two standard finishes and three heights – 13cm, 50cm and 80cm. Optic options of 180 and 360 degrees Available in color temperatures 2700K, 3000K and 4000K. The Etna operates on 24VDC.

Standard Finishes

Body

silver anodized aluminum
natural copper



Silver Anodized Aluminum



Natural Copper

JOB:	TYPE:	QUANTITY:
------	-------	-----------

NOTES:

Technical Data

Input

24VDC - Triac or 0-10V Dimmable

Wattage

10W

Color Temperatures

2700°K (WW), 3000°K (W), 4000°K (N)

3 step MacAdam ellipse binning

CRI / R9

92 / 84

Lumens


826 lm (W)

Optic


180°, 360°



Photometric data

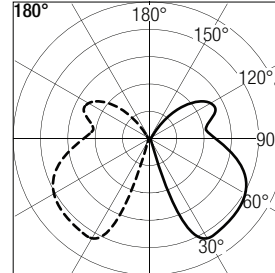


R (m)	180°	E (lx)
0,10		1350
0,20		447
0,50		109
1,00		37
1,50		21

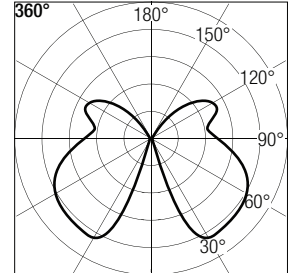


R (m)	360°	E (lx)
0,10		1350
0,20		447
0,50		109
1,00		37
1,50		21

Dimensions

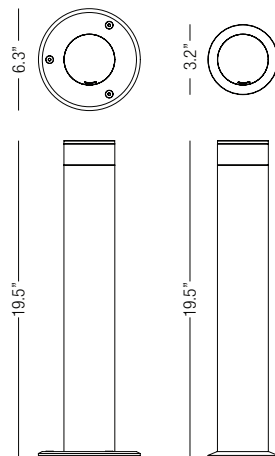

Mounting

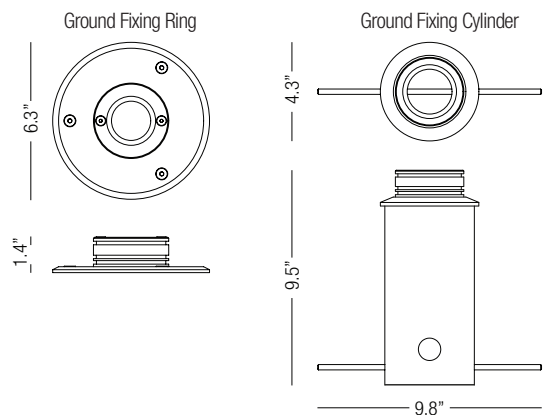

Order Code

Code	Wattage	Voltage	CRI & CCT	Optic	Body Finish	Mounting
ET50 -	10W	- 24VDC -				

927 = 90 CRI, 2700°K
930 = 90 CRI, 3000°K
940 = 90 CRI, 4000°K

180 = 180°
360 = 360°

SAA = Silver Anodized Aluminum
NC = Natural Copper
XX = Custom

GFR = Ground Fixing Ring
GFC = Ground Fixing Cylinder

Eg. ET50-10W-24VDC-930-360-NC