

Mini R



The PURALUCE MINI R light is constructed of machined aluminum with tempered glass lens. The color consistency is further ensured by 2-step MacAdam ellipse binning. Finely detailed construction allows this product to be used in a variety of indoor or outdoor applications. MINI R is available in standard finishes or any RAL painted finish with the option to create a one-of-a-kind lighting element with a custom painted color. The classic Italian design of MINI R combined with modern LED technology provides illumination and architectural integrity to any project.

Standard Finishes

satin stainless steel
natural bronze

SATIN STAINLESS
STEEL

NATURAL BRONZE

JOB:	TYPE:	QUANTITY:
------	-------	-----------

NOTES:

Technical Data

Input

350mA

Wattage

1.2W

Color Temperatures

2700°K (WW), 3000°K (W), 4000°K (N)

2 step MacAdam ellipse binning

CRI / R9

92 / 84

Lumens


150 lm (W)

Optic


16°, 90°



Dimensions

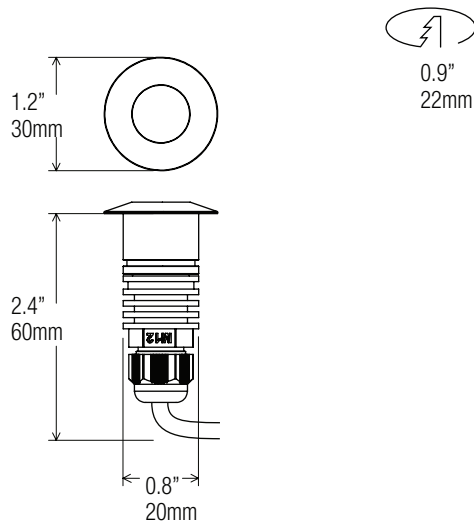

Photometric data

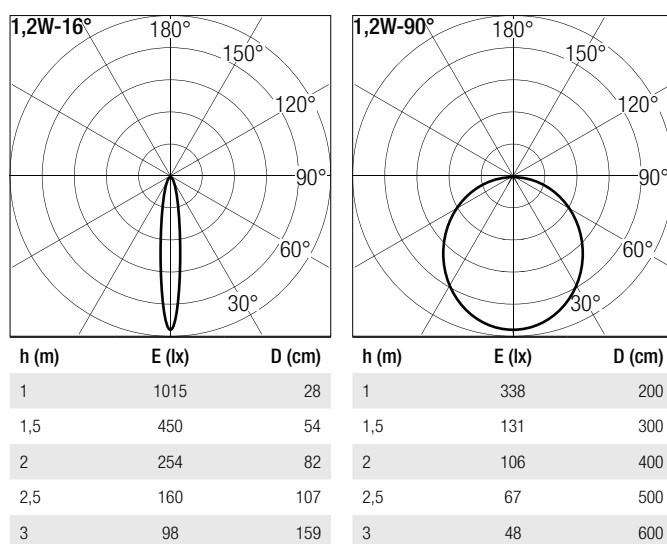


Order Code


Code	Wattage	Power	Dimming	CRI & CCT	Optics	Body Finish
MNR -	1W	350MA	UNV	-	-	-
				927 = 90 CRI, 2700°K	16 = 16° - narrow spot	SS = Stainless Steel
				930 = 90 CRI, 3000°K	90 = 90° - spot	NB = Natural Bronze
				940 = 90 CRI, 4000°K		XX = Custom

Eg. MNR-1W-350MA-UNV-930-36-SS


Accessori | Accessories



Spring for panel.
(20x31x12mm)



Recessed Box (type 1).
(Ø28mm H.60mm)



Plasterboard recessed box (type 2).
(Ø32mm H.20mm)